شركة الفهد للتجارة والصناعة والمقاولات فرع المنتجات الإنشائية





في خدمة الوطن



Introduction:-

Al-Fahd Company Trading Industries and Contracting (ISO Certified) was established in 1968 in Onaizah Al Qassim, Saudi Arabia. The company has expanded and developed as diversified project that meets some of the requirements of the Saudi market through four main sectors, Contracting, Real Estate Investment, Industry and Trading.

Since it's established the company worked on developing its business and providing high quality products in fields of ready mixed concrete, asphalt mixture, different types of tiles & blocks, prefabricated ceilings and Al-Fahd future houses.

We have also developed the production of chemically treated interlock tiles to prevent the penetration of salts to the surface of the tiles and preventing the leakage into it.

Al Fahd Company continues its capabilities to develop to the better to meet the challenges of the vision of 2030.

مقدمة :--


تأسست شركة الفهد للتجارة والصناعة والمقاولات عام 197۸ و مقرها الرئيسي بعنيزة منطقة القصيم ولها فروع أخري عاملة وحاصلة على شهادة ISO وقد نشأت الشركة كمشروع متنوع يلبي جزء من متطلبات وحاجات السوق السعودي وذلك من خلال أربعة قطاعات محورية وهي المقاولات والإستثمار العقاري و الصناعة والتجارة.

وقد عملت الشركة على تطوير أعمالها ومنتجاتها لتقديم منتجات عالية الجودة بأقل تكلفة وذلك في مجال الخرسانة الجاهزة والخلطات الأسفلتية و البلاط والبلوك بأنواعهم المختلفة و الأسقف الجاهزة والبيوت الجاهزة.

كما أننا طورنا البلاط المتداخل حيث يتم معالجة المنتج كيميائيا وذلك لمنع نفاذ الأملاح لسطح البلاط ومنع تسرب المواد إلى داخله.

كما أن الشركة سوف تستمر في تطوير منتجاتها لتتوافق مع رؤية المملكة . ٢٠٣٠.

البيهاتون



Dimension: 163 x 198 mm

Thickness: 60 mm Weight: 3.7 kg Area: 24161 mm² M²/Piece: 36 Pcs

معالج کیمیائیاً Chemically Treated












HOLLAND



Dimension: 100 x 200 mm

Thickness: 60 mm

Weight: 2.6 kg Area: 20000 mm² M²/Piece: 50 Pcs





Chemically Treated معالج کیمیائیا








INTERLOCK


مقاسات ومساحات البلاط المتداخل































Holland

Dimension: 100 x 200 mm

Thickness: 60 mm Weight: 2.6 kg Area: 20000 mm² M²/Piece: 50 Pcs

Behatton

Dimension: 163 x 198 mm

Thickness: 60 mm Weight: 3.7 kg Area: 24161 mm² M²/Piece: 36 Pcs

Uni

Dimension: 328 x 127 mm

Thickness: 60 mm Weight: 3.3 kg M²/Piece: 41 Pcs

3D

Dimension: 200 x 146.5 mm

Thickness: 60 mm Weight: 2.6 kg M²/Piece: 39 Pcs

Octa Decor

Dimension: 160 x 225 mm

Thickness: 60 mm Weight: 2.9 kg M²/Piece: 40 Pcs

Holland

Dimension: 100 x 100 mm Thickness: 60 - 80 mm Weight: 1.3- 1.8 kg M²/Piece: 100 Pcs

Delta

Dimension: 200 x 200 mm

Thickness: 60 mm Weight: 2.7 kg M²/Piece: 38 Pcs

مميزات المنتج:

- سهولة إستخدامه مع إمكانية إعادة إستعماله أكثر من مرة.
- أقل تكلفة من المنتجات الأخرى قياساً لعمره و إستمر اريته لفترات طويلة.
 - تنوع في الأشكال و الألوان.



















Dimension: 200 x 200 mm


Thickness: 60 mm Weight: 3.70 kg M²/Piece: 28Pcs






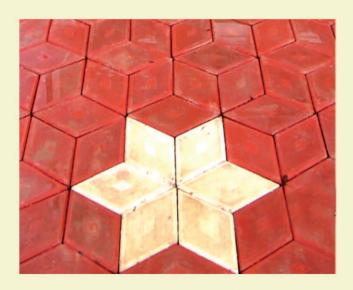




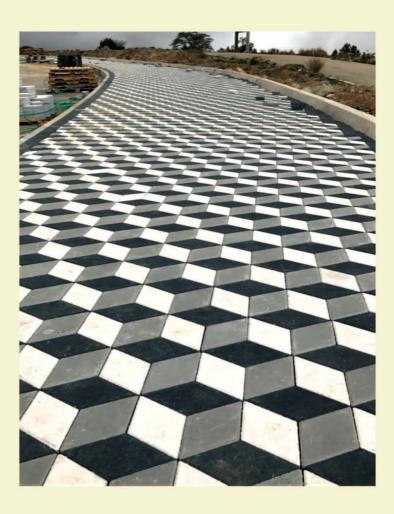



Dimension: 200 x 100 mm

Thickness: 60 mm Weight: 3.50 kg M²/Piece: 39Pcs













UNI DECORE


يوني ديكور



Dimension: 160 x 225 mm


Thickness: 60 mm Weight: 3.70 kg M²/Piece: 40 Pcs












Dimension: 208 x 103 mm

Thickness: 60 mm Weight: 3.3 kg M²/Piece: 41 Pcs







HEXAGONAL

البلاط السداسي




Dimension: 200 x 173.2 mm

Thickness: 60 - 80 mm M²/Piece: 28.9 Pcs







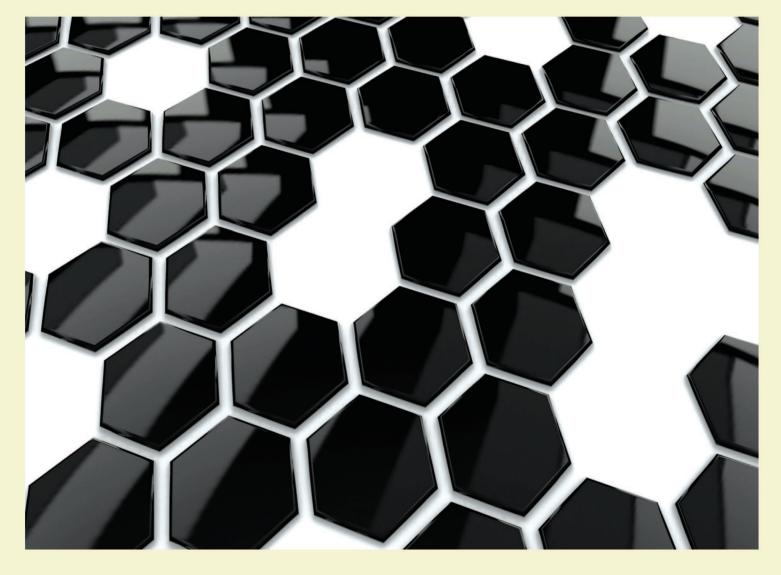



CURBSTONE

البلدورات



Dimension: 500 x 300 x 100 mm

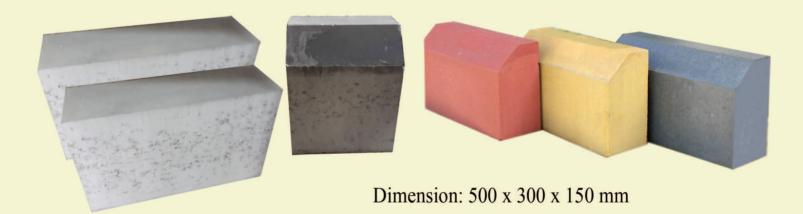

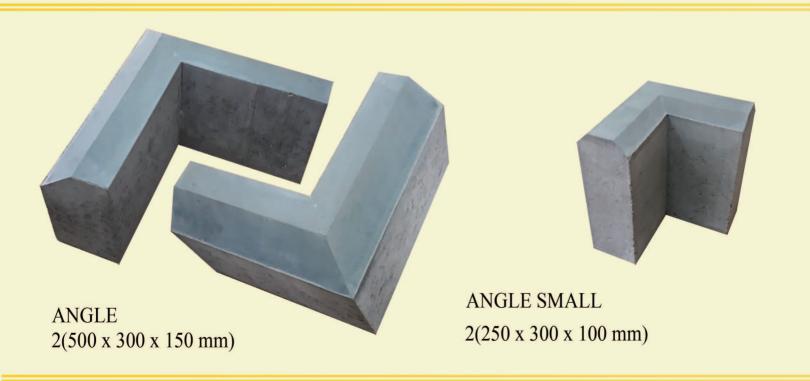



Tiles / البلاط

مقاس: مقاس: 500 x 600 mm 400 x 400 mm





البلدورات / Curbstones


Dimension: 91.4 x 150 x 300 mm

مقاس: 91.4 x 150 x 250 mm

91.4 x 12.4 x 300 mm 91.4 x 12.4 x 250 mm



بلاط أرصفة

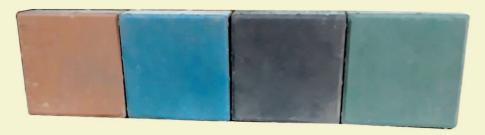

Dimension: 200 x 200 x 60 mm







Dimension: 400 x 400 x 60 mm 400 x 400 x 40 mm








Dimension: 500 x 500 x 60 mm






Dimension: 600 x 600 x 40 mm 600 x 600 x 60 mm

DELTA ಟು



Dimension: 200 X 200 mm Thickness: 60 mm

Thickness: 60 mm Weight: 3.40 kg M²/Piece: 38 Pcs

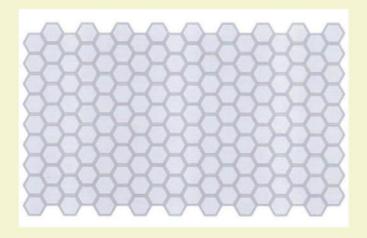










HOLLAND



Dimension: 100 x 100 mm Thickness: 60-80 mm Weight: 1.35 -1.8 kg M²/Piece: 100 Pcs








Multi Sizes & Colors

















المختبر

QUALITY CONTROL

مراقبة الجودة

We have a laboratory equipped with modern equipment and team of specialized workers to ensure good quality.

لدينا مختبر مزود بأجهزة حديثة وفريق عمل متخصص لضمان الجودة.

Our products stands high on verge of all quality so that they can easily withstand the local and national competition.

منتجاتنا تقف في قمة المنافسة على مستوي المنطقة او مستوي المملكة.

Our products are continuously tested and retested for their properties.

تخضع منتجاتنا بصورة مستمرة للإختبار وإعادة الإختبار لتأكيد خصائصها.

Our focus on quality is evident in our product range and performance.

تركيزنا على الجودة يتضبح في جودة منتجاتنا وادائنا.
























Hollow Core





3D Panels

ألواح ثلاثية الأبعاد






المزايا:-

عازلة للحرارة والصوت وتوفير للطاقة بنسبة %70

سرعة في إنهاء المباني مع تقليل التكاليف بنسبة %20

خفيفة الوزن مع قوة وأمان ضد الزلال













BLOCKS

البلوك



Hollow Block

Dimension: 20 x 20 x 40 cm

:15 x 20 x 40 cm :10 x 20 x 40 cm

المقاس



Liner Block

Dimension: 20 x 20 x 40 cm

:15 x 20 x 40 cm :10 x 20 x 40 cm

المقاس



Solid Block & Half Solid Block

Dimension: 20 x 20 x 40 cm

:15 x 20 x 40 cm

:10 x 20 x 40 cm

:10 x 10 x 20 cm



Block Hurdy

المقاس

البلوك الهوردي

BOZLAN BLOCK

البلوك البركاني -البوز لاني

ينتج من البحص البركاني الطبيعي ذو التجاويف الداخلية الخفيفة الوزن وعازلة للحرارة والصوت

يقل وزنه عن البلوك العادى بنسبة

التوصيل الحرارى

درجة إنخفاض الضجيج دي بي

مقاوم للإحتراق لمدة لاتقل عن ثلاث ساعات.

متوفر بجميع المقاسات.

يوجد بلوك بوز لانى معزول بالبولسترين

The bozlan block is produced from volcanic gravels wih light interval cavities islotating sound and heat. The weight of this type of block is less than normal block with 40%. It is stronger than the normal block.

- Thermal conductivity is 0.14 w/(m-k).
- Noise reduction level degree is 3-6 DB.
- Fire rating resistance at least 3 Hours.
- All sizes are available.
- Bozlani block isolated with polystyrene is available.

Hollow Block

Dimension: 20 x 20 x 40 cm

15 x 20 x 40 cm

10 x 20 x 40 cm



AL-FAHD.CO

TRADING INDUSTRIAES & CONTRACTING












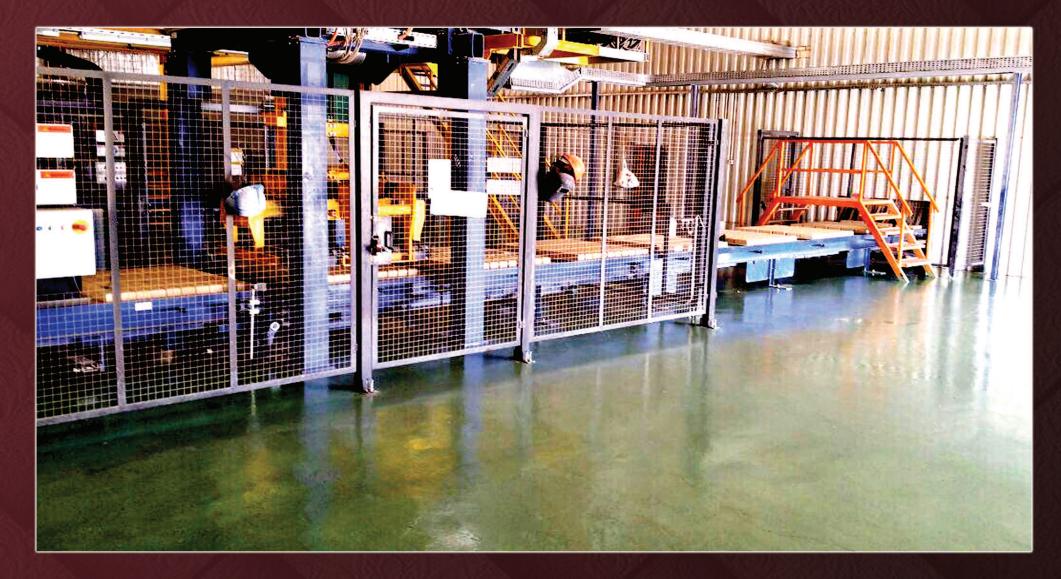

المملكة العربية السعودية-عنيزة-

KINGDOM OF SAUDI ARABIA-ONAIZAH-P.O.BOX.354 (51911) TEL: 016 3659999 - FAX: 016 3656222

المملكة العربية السعودية-الرياض-



CERTIFICATION OF REGISTRATION

This is to certify that

Quality Management Systems

AL-FAHD CO. FOR TRADING, INDUSTRIES AND CONTRACTING

P.O. Box 354, Onaizah (51911), Al-Qassim, Saudi Arabia.

Has been assessed and found to meet the requirements of:

ISO 9001:2015

The certificate is valid for the following scope of operation:

Ready-mixed concrete industry, block, interlocks, Curbs, Bishop Ready, structural panels, asphalt mixes and products breaker.

Certificate No. Q-0122

1st Surv. Done on: 16/10/2017 2nd Surv. Due Before: 07/11/2018

*After successful completion of surveillance audit, new certificate shall be issued

In the course of validity of the present certificate client management system must permanently satisfy the requirements of the International Regulations. The fulfillment of these regulations will be regularly controlled by The Certification International.







The Certification International

To check certification status: http://uafaccreditation.org/list-organisation-certified-uaf-accredited-certification-bodies

